



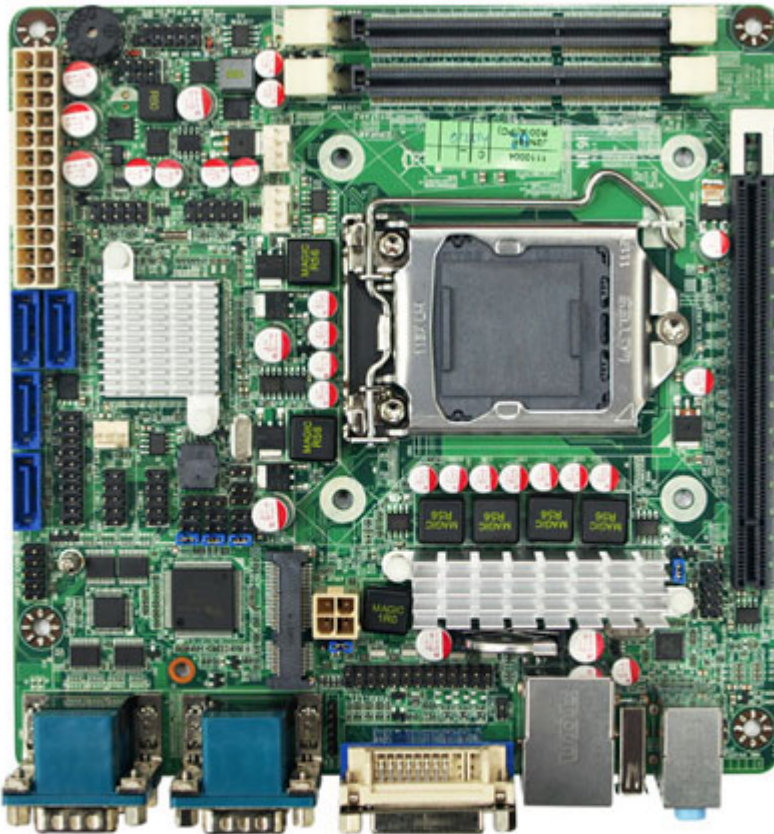

174.00 EUR
incl. 19% VAT, plus [shipping](#)

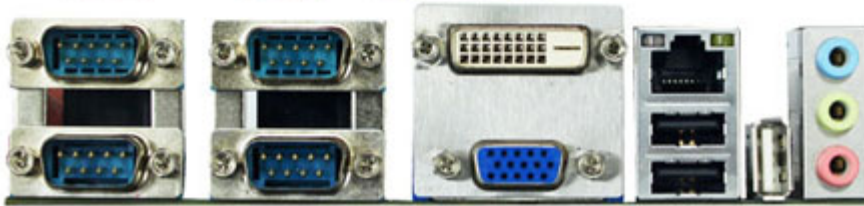

Support:  [Specifications \[EN\]](#)

- Intel® H61 Express Chipset
- Supports Intel LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
- 2 * Dual Channel DDR3-1333/1066 up to 16GB
- Realtek RT8111EVL Gigabit LAN
- PCI Express x16 Slot
- 4-port SATAII 3Gb/s
- DVI-D, and VGA Video Outputs
- Built-in Watchdog Timer Technology
- Mini-ITX Form Factor (170mm x 170mm)
- **CPU** INTEL® LGA 1155 Socket Core i7/i5/i3/Pentium Processor
- **Chipset** INTEL® H61 Chipset
- **Memory** 2 * 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
- **Expansion Slots** 1 *PCIe x 16
- **Storage** 4 * Serial ATA2 3Gb/s connectors
- **Audio** Realtek ALC662 6-Channel HD Audio CODEC
- **Ethernet LAN** Realtek RT8111EVL Gigabit Ethernet LAN
- **USB** Embedded 7 * USB 2.0/1.1
- **Special Features** Support ACPI S3
Support CPU Smart FAN
Support Watch Dog

-
- **Rear Panel I / O**
 - 3 * USB 2.0/1.1 ports
 - 1 * RJ-45 port
 - 4 * COM ports
 - 1 * DVI-D port
 - 1 * VGA port
 - 3 * Audio Phone Jack
 - **Internal I / O**
 - 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports
 - CPU /NB / Chassis Fan connectors
 - 1 * GPIO header
 - 1 * Parallel header
 - 2 * COM headers (COM6 for RS232/422/485)
 - 1 * CIR header
 - 1 * TPM header
 - 1 * Chassis Intrusion header
 - 1 * FP AUDIO header
 - 1 * 24-pin & 4-pin 12V ATX Power connector
 - **BIOS**
 - AMI EFI 64MB SMT Flash ROM
 - **Form Factor**
 - Mini-ITX Form Factor (170mm x 170mm)
 - **Functional**
 - ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
 - **Certificate**
 - CE, FCC, RoHS
 - **Temperature**
 - Operating within 0~60 centigrade
 - Storage within -20-85 centigrade

Product Accessories

- 2x COM cable
- Manual
- CD
- 2x SATA cable
- I/O shield