


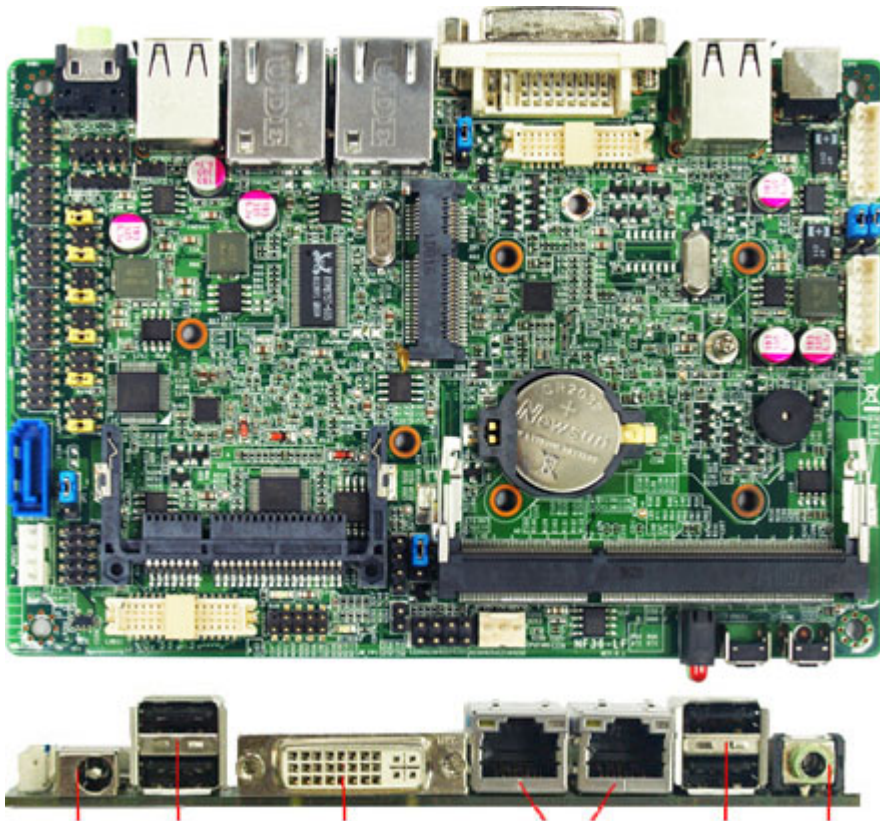

215.00 EUR

incl. 19% VAT, plus [shipping](#)

Support:  [Specifications \[EN\]](#)

- INTEL® Cedar Trail-M Processor N2600 + NM10 Chipset
- Support 1 * DDR3 800MHz Single CH up to 2GB
- Support DirectX 9 Graphics up to 640MHz
- Support 1 * Serial ATAII (3Gb/s) Devices
- Support Dual Gigabit LAN
- Support DVI-I Output
- Equipped with 802.11 b/g/n WiFi card & Internal Antenna (JBC362F36W-2600-B only)
- Support 2.5" SATA HDD
- Support Mini PCI-E socket
- Support CFast card socket

CPU	INTEL® Cedar Trail-M Processor N2600 (1.6GHz) INTEL® Cedar Trail-M Processor N2800 (1.86GHz)
Chipset	INTEL®NM10 Express chipset
Memory	1 * DDR3 800MHz Single CH SO-DIMM up to 2GB (For Cedar Trail-M N2600) 1 * DDR3 1066MHz Single CH SO-DIMM up to 4GB (For Cedar Trail-M N2800)
Expansion Slots	1 * MINI PCI-E
Storage	1 * Serial ATAII 3Gb/s connectors 1 * CFast card socket
Audio	Realtek ALC662 HD Audio CODEC with 4-Channel
Ethernet LAN	2 * RTL8111E PCI-EVL Gigabit LAN
USB	Embedded 7 * USB 2.0/1.1
LVDS	Onboard 1 * 24-bits Dual channel & 1 * 18-bits Single LVDS connectors 4 * USB 2.0/1.1 ports 2 * RJ-45 ports
Rear Panel I / O	Line-out port 1 * DVI-I port 1 * 12V DC-IN JACK

Internal I / O

2 * USB 2.0 header for 3 * USB 2.0 ports

1 * Audio header

System/Chassis/NB Fan Connectors

1 * GPIO header

1 * CFast card reader socket

DIY switch x2 (reset & power button)

4 * COM header (COM1~3 for RS232, COM4 for RS232/422/485)

BIOS

AMI 16MB SMT Flash ROM

Form Factor

3.5" SBC form factor (148mmx102mm)

Certificate

CE,FCC,RoHS,ERP

FunctionalATM, Automation, Medical Equipment, Security, General Application, Transportation, Digital Signage,
Kiosk, POS machine, LCD TV PC, Embedded Fanless application**Temperature**

Operating within 0~60 centigrade

Storage within -20-85 centigrade

Product Accessories

- DVI-I to CRT Converter
- Manual
- CD
- 1x SATA cable
- SATA power cable
- 4x COM cable