




1958.00 EUR
incl. 19% VAT, plus [shipping](#)

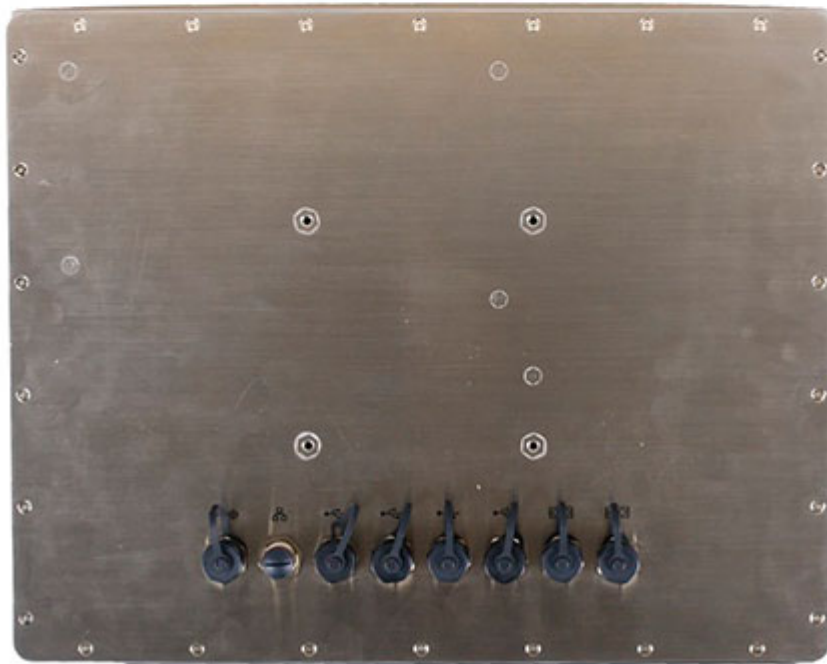

- 12.1" 500 nits high brightness SVGA TFT LCD with LED backlight
- Onboard Intel® Bay Trail-D J1900 2.0GHz Quad Cores CPU
- Onboard SAMSUNG 4G/1333MHz DDR3L Memory
- Support Intel® Gigabit LAN
- Support 2 * COM ports (Support RS232/422/485)
- Support 4*USB2.0 ports
- Support 2.5" SATA HDD, 1 * M.2 connector
- 1 * Mini PCI-E
- Support wide voltage input 9~28V
- Overall support for IP67 levels

Display

Front Bezel

- IP67, NEMA 4 rugged protection, Overall

Display Type	- 12.1" With LED Backlight
Brightness (cd/m²)	- 500 nits
Display Color	- 262K
Resolution	- 1024 x 768 @ 60Hz
Viewing Angle (H/V)	- 160°/140°
Pixel Pitch	- 0.24 x 0.24 mm
Aspect Ratio	- 4:3
Contrast Ratio	- 700:1
Response Time	- 25 ms
Touch screen	
Type	- 5 wires analog resistive type
Active Range	- 246.80 x 185.50mm ±0.2mm
Transparency	- 80 ±3%
Operating Force	- ■ 80g
Knock test	- 10,000,000 times keystrokes
Main System	
CPU	- Intel® Bay Trail-D J1900 2.0GHz/QC
RAM	- 4G 1333MHz DDR3L SAMSUNG DRAM
BIOS	- 64MB SPI Flash ROM
Storage	- 1 * 2.5" SATA HDD - 1 * M.2 connector (2242/2260/2280)
Watchdog Timer	- 255 levels, 0~255 sec.
OS Support	- Windows 7 / 8.1 / 10 / Linux
I/O Connector	
I/O Ports and Switches	- 4 * USB2.0 - 2 * RS232/422/485 - 1 * LAN (Intel® I211AT Gigabit LAN) - 1 * Locking Jack 9~28V DC input - 1 * Power button
Expansion Interface	
Expansion	- 1 * PCI-E mini card for WIFI or 4G/3G
Power	
Power Input	- AC version: 100~240V AC-DC 60W power adapter or - DC version: 9~28V DC with over current protection fuse
Power Consumption	- 25W
Dimensions	
Case Dimensions	- 307.8*246.5*50mm
Packing Dimensions	- 307.8*246.5*50mm
Certifications	
Certifications	- CE, FCC, IP67
Environment	
Temperature	- Operating: -10°C ~ 60°C (with W.T. DRAM/HDD in airflow condition) - Operating: -10°C ~ 60°C (with W.T. DRAM/HDD) - Storage: -20°C ~ 65°C
Shock	- Operating: 15G ■ 11ms duration
Vibration	- Operating: 5~500Hz/1 Grms
Warranty	
Warranty	- The warranty of 2 years, panel the warranty of 1 year